

# Inloppskona 400



Mer information, se datablad engelskt.


## Teknisk data

|        |              |
|--------|--------------|
| Art.nr | 54476-2-4013 |
|--------|--------------|

Se [www.ebmpapst.se](http://www.ebmpapst.se) för uppdaterad information

# Inloppskona 400

## Ritning

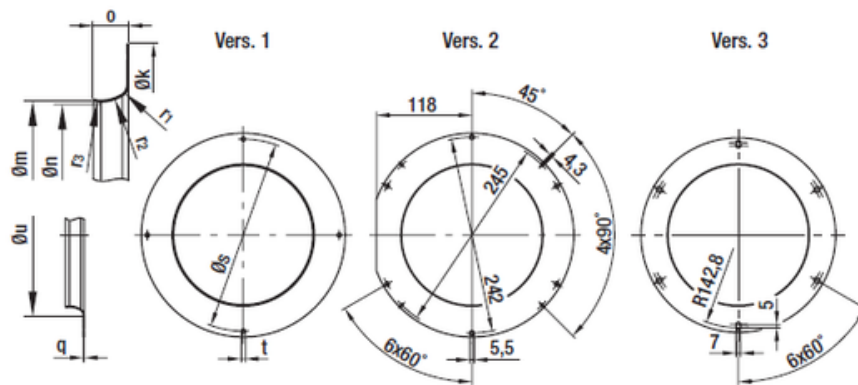

– Material: Galvanised sheet steel

Inlet nozzles for backward curved centrifugal fans

| Part no.     | Size <sup>(1)</sup>    | Vers. | k     | m     | n     | o    | q    | r <sub>1</sub> | r <sub>2</sub> | r <sub>3</sub> | s     | t      | u     |
|--------------|------------------------|-------|-------|-------|-------|------|------|----------------|----------------|----------------|-------|--------|-------|
| 96120-2-4013 | 120 (P)                | 1     | 146.0 | 94.4  | —     | 18.0 | 0.80 | 16.0           | —              | —              | 134.0 | 4x4.5  | 126.0 |
| 09566-2-4013 | 133 (P)                | 1     | 129.0 | 87.0  | —     | 13.0 | 1.00 | 8.0            | —              | —              | 118.0 | 4x4.5  | 103.0 |
| 09576-2-4013 | 175/190 (P)            | 1     | 170.0 | 125.5 | —     | 14.0 | 1.25 | 10.0           | —              | —              | 158.0 | 4x4.5  | 146.0 |
| 09609-2-4013 | 220 (P)                | 2     | 252.0 | 155.0 | —     | 21.0 | 0.80 | 22.0           | —              | —              | —     | —      | 199.0 |
| 96358-2-4013 | 225 (P)                | 1     | 223.0 | 146.0 | —     | 28.0 | 1.50 | 25.0           | —              | —              | 210.0 | 4x4.5  | 196.0 |
| 96359-2-4013 | 250 (P/S)              | 1     | 255.0 | 164.5 | —     | 31.0 | 1.50 | 28.0           | —              | —              | 240.0 | 4x4.5  | 221.0 |
| 96360-2-4013 | 270/280 (S)            | 1     | 280.0 | 182.5 | —     | 35.0 | 1.50 | 31.0           | —              | —              | 260.0 | 4x4.5  | 245.0 |
| 97512-2-4013 | 310 (P)                | 3     | 300.0 | 192.0 | —     | 53.0 | 1.00 | 30.0           | 60.0           | —              | —     | —      | 257.0 |
| 31050-2-4013 | 310 (A)                | 1     | 300.0 | 211.0 | 208.1 | 48.0 | 1.25 | 18.0           | 55.5           | 35.0           | 280.0 | 4x4.5  | 256.0 |
| 31051-2-4013 | 310 <sup>(2)</sup> (A) | 1     | 300.0 | 211.0 | 209.2 | 27.5 | 1.25 | 10.0           | 32.0           | 20.0           | 280.0 | 4x4.5  | 236.0 |
| 51357-2-4013 | 330/355 (P)            | 1     | 350.0 | 224.0 | —     | 60.0 | 1.50 | 54.0           | 28.0           | —              | 325.0 | 4x4.5  | 284.0 |
| 35560-2-4013 | 355 (A)                | 1     | 350.0 | 240.0 | 236.4 | 60.0 | 1.50 | 22.5           | 70.0           | 44.0           | 325.0 | 4x4.5  | 296.0 |
| 35561-2-4013 | 355 <sup>(2)</sup> (A) | 1     | 350.0 | 240.0 | 238.0 | 30.0 | 1.50 | 11.0           | 35.0           | 22.0           | 325.0 | 4x4.5  | 267.0 |
| 54476-2-4013 | 400 (A)                | 1     | 370.0 | 257.0 | —     | 66.0 | 1.50 | 22.0           | 50.0           | 90.0           | 345.0 | 4x4.5  | 322.0 |
| 54478-2-4013 | 450 (A)                | 1     | 413.0 | 287.0 | —     | 71.0 | 1.50 | 25.0           | 55.0           | 100.0          | 390.0 | 6x9    | 362.0 |
| 63045-2-4013 | 450 (A)                | 1     | 450.0 | 289.0 | 284.5 | 75.0 | 1.50 | 28.0           | 87.0           | 49.0           | 425.0 | 6x9    | 360.0 |
| 54480-2-4013 | 500 (A)                | 1     | 520.0 | 323.0 | —     | 79.0 | 1.50 | 28.0           | 65.0           | 115.0          | 430.0 | 6x9    | 408.0 |
| 63072-2-4013 | 500 (A)                | 1     | 470.0 | 342.0 | 337.0 | 75.0 | 2.00 | 28.0           | 87.0           | 55.0           | 445.0 | 6x9    | 412.0 |
| 63071-2-4013 | 560 (A)                | 1     | 515.0 | 385.0 | 380.0 | 82.0 | 2.00 | 30.0           | 95.0           | 60.0           | 490.0 | 6x9    | 461.0 |
| 63070-2-4013 | 630 (A)                | 1     | 634.0 | 433.0 | 427.0 | 98.5 | 2.00 | 37.0           | 14.0           | 72.0           | 600.0 | 6x10.5 | 525.0 |

subject to alterations

(1) size with key for impeller material: (P) = plastic, (S) = sheet steel, (A) = aluminium (2) short inlet nozzle

# Inloppskona 400

## Kontakt

**ebm-papst AB**

Äggelundavägen 2

175 62 Järfälla

Tel: 010-454 44 00

Fax: 08-36 23 06

[info@ebmpapst.se](mailto:info@ebmpapst.se)

[www.ebmpapst.se](http://www.ebmpapst.se)